

SUPER STICK

The SUPER S105 double-sided tape applicator will drastically reduce the time your company spends handling cardboard products (folders, boxes, displays, stands etc.) that need double sided tape. The machine has high quality tape pattern controller that enables you to program and save a multitude of tasks related to the handling of cardboard product.



The patented metering units have a new rewind system that enables you to remove the 2nd liner from double-backed tape for product line assembly. The Patent tape applying systems provide a fast and reliable method of placing both strips and spots of pressure sensitive tape onto virtually any surface. The S105 accepts material up to 105cm wide. It utilizes a stationary transmitter and receptor photo-optic cell sensing system, insuring the highest production accuracy. The electronic and air logic system permits simultaneous intermixing of strips and spots.

Specifications :	SUPER S105
Product Handling :	109cm
Product Thickness :	4mm
No. of tape heads :	2 - 6
Tape roll size :	30.5cm OD on 7.6cm standard
Tape widths :	Adjustable upto 25.4cm
Air requirements :	60 PSI / min
Weight :	120Kg
Dimensions :	1500 x 1400 x 1050 mm



Control panel consists of counter, speed, sensor and power control



Patent tape applicator head for dispensing tape onto a working surface




High standard solenoid valve for smooth running and quick releasing




Easy tape guides for setting the width of the tape



Easy receiving system ensures paper collection more regular and convenient



Easy guiding side lays for feeding accuracy

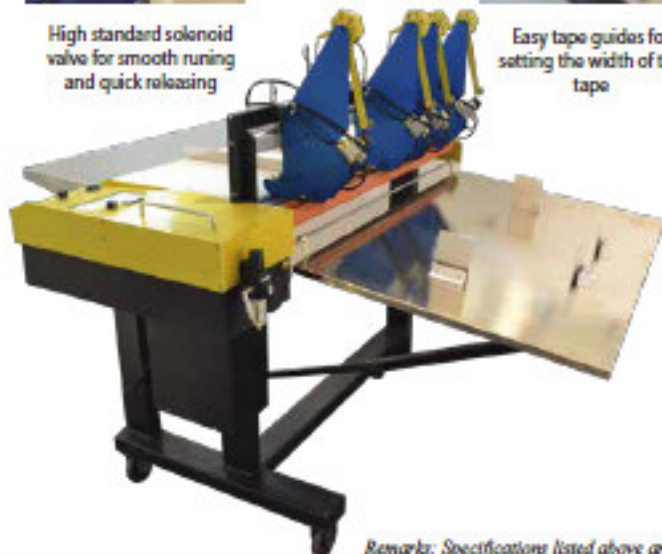

High quality tape pattern controller from ROBATECH



Enhance encoder system working with pattern controller

Remarks: Specifications listed above are for refer only and be subjected to changes without any prior notice.